

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/105313 A1

(51) International Patent Classification⁷: H02K 5/00

(21) International Application Number: PCT/EP03/05069

(22) International Filing Date: 13 May 2003 (13.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02388040.4 11 June 2002 (11.06.2002) EP
60/389,605 18 June 2002 (18.06.2002) US

(71) Applicant (for all designated States except US): SONY
ERICSSON MOBILE COMMUNICATIONS AB
[SE/SE]; S-221 88 Lund (SE).

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WOLFF, Martin
[DE/SE]; Rörsjögatan 7, S-211 37 Malmö (SE).

(74) Agent: ZACCO DENMARK A/S; Hans Bekkevolds Allé
7, DK-2900 Hellerup (DK).


(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN ELECTRONIC DEVICE WITH A VIBRATOR AND AN EXCHANGEABLE COVER

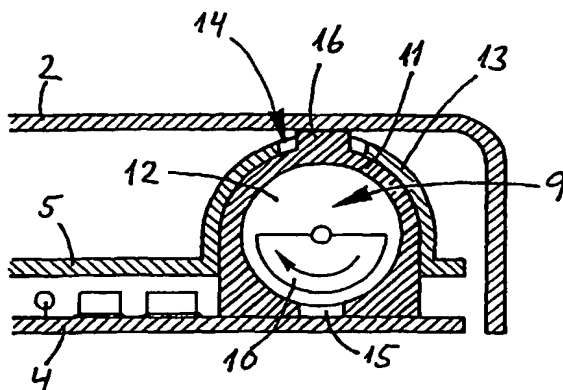

(57) Abstract: An electronic device comprising a frame part, a PCB (printed circuit board) (4) provided with electronic components, a vibrator (9) electrically connected to said PCB (4) and being fixed in relation to the frame part, and an exchangeable outer cover (2) releasably connected to the frame part. The vibrator (9) is provided with an elastic fitting (11), and the exchangeable outer cover (2) abuts on the elastic fitting (11) when it is mounted on the electronic device.

WO 03/105313 A1

Title

An electronic device with a vibrator and an exchangeable cover

5

Technical field

The invention relates to an electronic device comprising

- a frame part;
- 10 – a PCB (printed circuit board) provided with electronic components, which PCB is connected to the frame part;
- a vibrator electrically connected to the PCB, which vibrator is fixed in relation to the frame part by means of an elastic fitting; and
- an exchangeable outer cover releaseably connected to the frame part.

15

Related prior art

Many electronic devices, such as mobile telephones, pagers, PDAs, etc., are
20 provided with a vibrator that silently alerts a user when a message or an incoming call is received. The vibrator usually comprises a small electromotor provided with an unbalanced mass at a rotating shaft, and it is usually mounted in the electronic device by means of an elastic fitting, such as a rubber grommet or a flexible metal holder.

25

In electronic devices provided with fixed covers, such as a front cover and a back cover, the vibrator is conventionally mounted in a recess provided at the inner surface of one of the covers. However, in the electronic devices to which the invention relates, i.e. electronic devices provided with at least one
30 exchangeable cover, the vibrator is positioned away from the exchangeable cover in order to ensure that the user does not accidentally destroy the vibrator or loosen it from its contact with the PCB. In these electronic devices the vibrator may be mounted in a recess of a not-exchangeable cover or in a holder that is connected to the PCB.

35

However, when the vibrator is located away from the exchangeable cover the vibration that is produced when the unbalanced mass rotates must travel through a number of elements, such as the PCB and internal frame parts, before it reaches the exchangeable cover. The passage through these
5 various elements dampens the vibration before it reaches the exchangeable cover, whereby the vibration that is experienced at the exchangeable cover is substantially weaker than the vibration at the location of the vibrator.

10 Object of the invention

Electronic devices such as mobile telephones and components are therefore to an increasing extent made smaller and smaller. However, if the vibration waves must travel through a number of elements before they reach the
15 cover, a relatively large vibrator must be employed in order to ensure that the experienced vibration has a certain magnitude. A smaller vibrator can be employed if it is mounted directly in a recess provided in the exchangeable cover, which, however, is undesirable since it would entail that the vibrator must be dismantled from the cover and re-mounted in the new cover. If such
20 operation is necessary there is a great risk that the vibrator is lost or re-mounted wrongly which may cause the vibrator or other electronic components to be destroyed when the new cover is mounted.

It is therefore an object of the invention to provide an electronic device as
25 mentioned in the opening paragraph in which it is possible to use a small vibrator that cannot be accidentally destroyed or loosened from the PCB and that is in relatively close contact with the exchangeable cover.

30 Summary of the invention

The object of the invention is achieved by arranging the electronic device mentioned in the opening paragraph in such manner that the exchangeable outer cover abuts on the elastic fitting when the exchangeable outer cover is
35 mounted on the electronic device.

Thereby is achieved that the vibrator can be securely mounted in the main body of the electronic device while the vibration waves generated by the vibrator may still be transferred directly to the exchangeable cover via the elastic fitting provided on the vibrator. Another advantage that is achieved by
5 arranging the exchangeable cover in abutment on the elastic fitting is elimination of the known problem of a rattling cover where the high requirements to production tolerances of the coupling means of the exchangeable cover and of the electronic device are not met. In the electronic device according to the invention the exchangeable cover abuts
10 on the elastic fitting, and due to the inherent elasticity of the elastic fitting it is ensured that the exchangeable cover is always in elastic abutment on the elastic fitting thereby eliminating any tolerance slip. No rattling of the cover will therefore occur.

15 In a preferred embodiment of the invention the electronic device is provided with a protective shell element that is connected to the frame part, which protective shell element is positioned between the PCB and the exchangeable outer cover; and the vibrator is mounted on the protective shell element. The protective shell element thereby holds the vibrator as well
20 as protects any other electronic components positioned on the PCB, and the risk of accidentally destroying or loosening of parts or components when the cover is removed is minimized.

Preferably, the vibrator is mounted on a side of the shell element that faces
25 towards the PCB, and an access opening is provided in the shell element through which the exchangeable outer cover abuts on the elastic fitting. Thereby the vibrator is also protected by the shell element and the risk of accidentally destroying or loosening the vibrator when the cover is removed is minimized.

30 In a first embodiment of the invention the elastic fitting is provided with a protruding fitting part that protrudes through the access opening, and in a second embodiment of the invention the exchangeable outer cover is provided with a protruding cover part that protrudes through the access
35 opening. The function of either of these embodiments is to ensure that the exchangeable cover abuts on the elastic fitting.

In a preferred embodiment the vibrator comprises a housing, and the elastic fitting surrounds at least a major part of the housing. By arranging the elastic fitting in this manner it is ensured that the vibration waves travel through the elastic fitting, while at the same time the elastic fitting protects any other parts of the electronic device from the direct vibrating movement of the housing of the vibrator.

The elastic fitting may comprise a rubber grommet or it may comprise a flexible metal holder. In either case the elastic fitting serves both as an elastic part on which the exchangeable cover abuts and as a flexible holding means for the vibrator.

Preferably, the electronic device is a mobile radio station, such as a mobile telephone, and the exchangeable outer cover is a front cover, while the frame part is a back cover.

It shall be emphasised that the term "comprise/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components, but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

Description of the drawings

The invention will be described in detail in the following with reference to the drawings in which

Fig. 1 shows an electronic device according to the invention provided with an exchangeable front cover that is removed from the body of the electronic device;

Fig. 2 shows a cross-section of the contact between the vibrator and a cover in a first embodiment comprising a rubber grommet;

Fig. 3 shows a cross-section of the contact between the vibrator and a cover in a second embodiment comprising a rubber grommet; and

Fig. 4 shows a cross-section of the contact between the vibrator and a cover in a third embodiment comprising a flexible metal holder.

Detailed description of embodiments of the invention

10 Fig. 1 shows an electronic device according to the invention in the shape of a mobile telephone 1 provided with an exchangeable front cover 2 that is removed from the body of the mobile telephone 1. The mobile telephone 1 comprises a frame part 3 that, in the shown embodiment, consists of a back cover that is not exchangeable. The frame part 3 holds a PCB 4 that is
15 located underneath a shell element 5 consisting of a thin metal plate. The PCB is provided with electronic components of which a loudspeaker 6 and a display 7 are visible, while other electronic components are concealed and protected by the shell element 5. An exchangeable key pad 8 is positioned on the shell element 5.

20 A vibrator 9 consisting of a small electromotor with an unbalanced mass 10 at a rotating shaft is fixed in the shell element 5 and is electrically connected to the PCB 4 by means of resilient contacts, such as pogo pins or the like, generally known in the art. The vibrator 9 is fixed in relation to the frame part
25 3 by means of an elastic fitting in form of a rubber grommet 11 that at least partly surrounds the housing 12 of the vibrator 9 (see Figs 2-3). The shell element 5 is provided with a holder part 13 formed by depressing a part of the shell element 5 to a shape that can receive the vibrator 9 and the rubber grommet 11. An access opening 14 is provided in the holder part 13, which
30 access opening 14 provides access for the exchangeable front cover 2 to the rubber grommet 11 as it will be described below with reference to Figs 2 and 3.

It should be mentioned that the frame part 3 need not consist of the back
35 cover, but could be a separate element whereto all other elements of the

mobile telephone is connected. This will indeed be the case if the back cover as well as the front cover 2 is exchangeable.

Fig. 2 shows a cross-section of the contact between the vibrator 9 and the front cover 2 in a first preferred embodiment of the invention. The housing 12 of the vibrator 9 is partly surrounded by the rubber grommet 11, and the vibrator 9 is withheld in the shell element 5 by means of the rubber grommet 11 that is elastically squeezed into the holder part 13 of the shell element 5. The shell element 5 is located above the PCB 4 in order to protect the electronic components on the PCB 4 and is fixed in relation to the PCB 4 to ensure that the vibrator is in electrical contact with contact means, such as pogo pins, provided on the PCB 4 (not shown).

The rubber grommet 11 is provided with a longitudinal slit 15 in the bottom part, whereby the rubber grommet 11 can be opened when it is mounted on the housing 12 of the vibrator 9.

The rubber grommet 11 is further provided with a protruding grommet part 16 that protrudes through the access opening 14 in the holder part 13 of the shell element 5. When the front cover 2 is mounted on the mobile telephone 1, as illustrated in Fig. 2, the protruding grommet part 16 abuts on the inner surface of the front cover 2. This means that the vibration waves created by the vibrator 9 are transferred directly to the front cover 2 via the rubber grommet 11 and they need not travel through a large number of elements as it is the case with the known electronic devices with an exchangeable outer cover.

Fig. 3 shows a cross-section of the contact between the vibrator 9 and a front cover in an alternative embodiment of the invention. This second embodiment corresponds in many details to the first embodiment shown in Fig. 2 and the same reference numerals will be used for identical parts.

Also in this embodiment the housing 12 of the vibrator 9 is partly surrounded by an elastic fitting in form of a rubber grommet 111, and the vibrator 9 is withheld in the shell element 5 by means of the rubber grommet 111 that is elastically squeezed into the holder part 13 of the shell element 5. Again, the

shell element 5 is located above the PCB 4 in order to protect the electronic components on the PCB 4 and is fixed in relation to the PCB 4 to ensure that the vibrator is in electrical contact with contact means, such as pogo pins, provided on the PCB 4 (not shown).

5

The rubber grommet 111 shown in Fig. 3 differs from the rubber grommet 11 shown in Fig. 2 in two points. First, the rubber grommet 11 is not provided with a longitudinal slit, i.e. the rubber grommet 111 must be mounted on the housing 12 of the vibrator 9 by longitudinally sliding the housing 12 of the vibrator 9 into the central opening of the rubber grommet 111. Second, the rubber grommet 111 is not provided with a protruding grommet part that protrudes through the access opening 14 in the holder part 13 of the shell element 5. On the contrary, in this embodiment the rubber grommet 111 is located fully within the holder part 13 of the shell element 5. The front cover 102 is, however, provided with a protruding cover part 116 that protrudes through the access opening 14 in the holder part 13 of the shell element 5, when the front cover 102 is mounted on the mobile telephone 1, as illustrated in Fig. 3, thereby abutting on the rubber grommet 111. Also in this embodiment, the vibration waves created by the vibrator 9 are transferred directly to the front cover 102 via the rubber grommet 111 and the protruding cover part 116.

Fig. 4 shows yet another cross-section of the contact between the vibrator 9 and a front cover in a further alternative embodiment of the invention. Again, this third embodiment corresponds in many details to the first embodiment shown in Fig. 2 and the same reference numerals will be used for identical parts.

Also in this embodiment the housing 12 of the vibrator 9 is partly surrounded by an elastic fitting which, however, has the form of a flexible metal holder 211, and the vibrator 9 is withheld in the shell element 5 by means of the flexible metal holder 211 that is firmly connected to the holder part 13 of the shell element 5 at one end 217, e.g. by soldering or welding or snapping. The vibrator 9 may also be snapped into the flexible metal holder 211. Again, the shell element 5 is located above the PCB 4 in order to protect the electronic components on the PCB 4 and is fixed in relation to the PCB 4 to

ensure that the vibrator is in electrical contact with contact means, such as pogo pins, provided on the PCB 4 (not shown).

5 As mentioned above, the flexible metal holder 211 is firmly connected to the holder part 13 at one end 217, and the other end 218 of the metal holder 211 forms a rounded free end that protrudes out of the access opening 14 and elastically abuts on the front cover 202.

10 Also in this embodiment, the vibration waves created by the vibrator 9 are transferred directly to the front cover 202 via the flexible metal holder 211 in a manner very similar to the first embodiment shown in Fig. 2.

15 The flexible metal holder 211 may be connected to the shell element 5 in another manner than shown in Fig. 4 and it may be provided with a larger opening than shown in Fig. 4 such that the vibrator 9 can be snapped into the flexible metal holder 211. It is even perceivable that the flexible metal holder 211 with an elastic free end 218 abutting on the exchangeable cover 202 is an integral part of the shell element 5.

20 The invention has been described with reference to preferred embodiments of the invention. However, other modifications to the electronic device according to the invention may be applied than the ones described and shown. For instance, the vibrator need not be withheld by a shell element, but might be mounted directly on the PCB or on another part of the electronic
25 device as long as it is ensured that the vibrator is in electrical contact with the PCB and abuts on the exchangeable cover via an elastic fitting.

30 The exchangeable cover may be a front cover as shown in Figs 1-4 or a back cover or both or any other cover or cover part that it is desirable to make exchangeable.

The vibrator is shown in a preferred embodiment in Figs 1-4, i.e. a vibrator comprising a housing with an electromotor and a rotating shaft with an unbalanced mass. However, the vibrator may be of any other suitable kind,
35 such as a piezoelectric vibrator. The orientation of the rotating axle of the

vibrator may also be different from the one shown, e.g. inclined or perpendicular to the PCB.

- 5 Even further modifications are applicable to an electronic device according to the invention without departing from the scope of the invention as defined in the accompanying claims.

Claims

1. An electronic device (1) comprising
- a frame part (3);
 - 5 – a PCB (printed circuit board) (4) provided with electronic components,
 - said PCB (4) being connected to said frame part (3);
 - a vibrator (9) electrically connected to said PCB (4),
 - said vibrator (9) being fixed in relation to said frame part (3) by means of an elastic fitting (11;111;211); and
 - 10 – an exchangeable outer cover (2;102;202) releaseably connected to said frame part (3);

characterised in that said exchangeable outer cover (2;102;202) abuts on said elastic fitting (11;111;211) when said exchangeable outer cover (2;102;202) is mounted on said electronic device (1).

15

2. An electronic device according to claim 1, **characterised in** that a protective shell element (5) is connected to the frame part (3), said protective shell element (5) being positioned between said PCB (4) and said exchangeable outer cover (2;102;202); and that the vibrator (9) is mounted
- 20 on said protective shell element (5).

3. An electronic device according to claim 2, **characterised in** that the vibrator (9) is mounted on a side of the shell element (5) that faces the PCB (4); and that an access opening (14) is provided in the shell element (5)
- 25 through which the exchangeable outer cover (2;102;202) abuts on the elastic fitting (11;111;211).

4. An electronic device according to claim 3, **characterised in** that the elastic fitting (11;211) is provided with a protruding fitting part (16) that
- 30 protrudes through the access opening (14).

5. An electronic device according to claim 3, **characterised in** that the exchangeable outer cover (102) is provided with a protruding cover part (116) that protrudes through the access opening (14).

35

6. An electronic device according to any one of claims 1-5, **characterised in** that the vibrator (9) comprises a housing (12); and that the elastic fitting (11;111;211) surrounds at least a major part of the housing (12).

5 7. An electronic device according to any one of claims 1-6, **characterised in** that the elastic fitting comprises a rubber grommet (11;111).

8. An electronic device according to any one of claims 1-6, **characterised in** that the elastic fitting comprises a flexible metal holder (211).





10

9. An electronic device according to any one of claims 1-8, **characterised in** that the electronic device (1) is a mobile radio station, such as a mobile telephone.

15

10. An electronic device according to claim 9, **characterised in** that the exchangeable outer cover (2;102;202) is a front cover; and that the frame part (3) is a back cover.

20

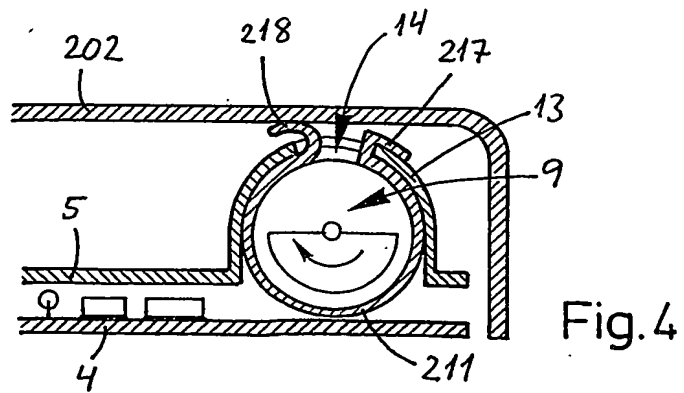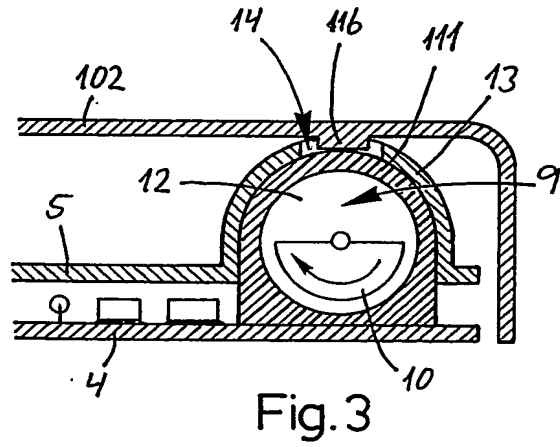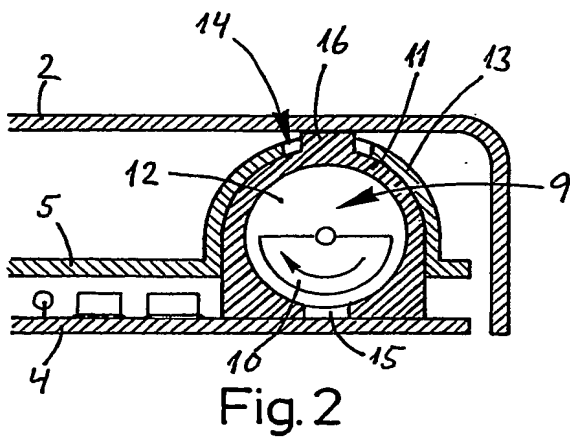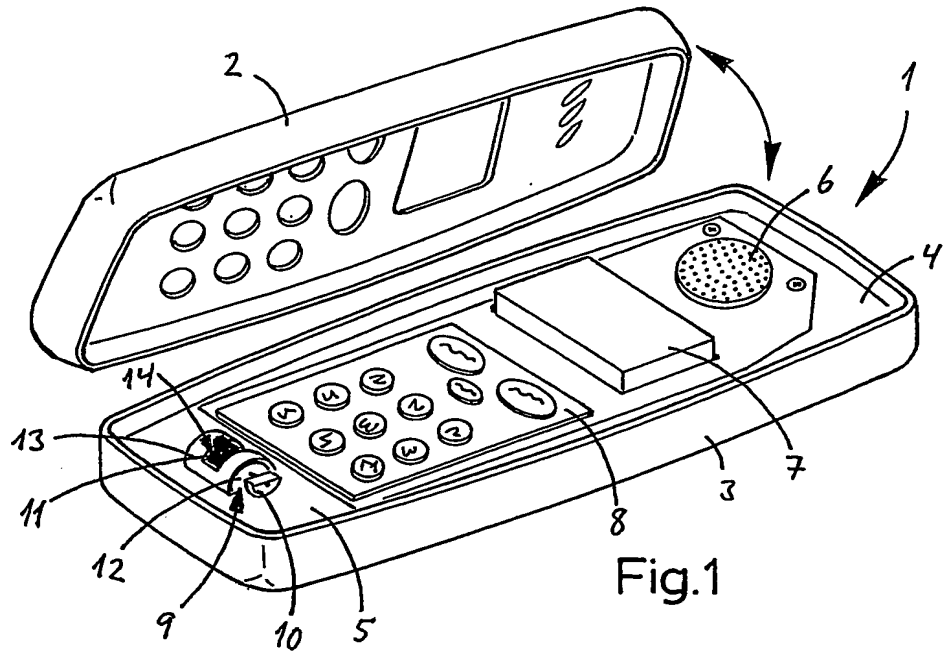

INTERNATIONAL SEARCH REPORT

International Application No

EP 03/05069

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H02K5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H02K G08B H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/027009 A1 (SATO NORIYOSHI ET AL) 7 March 2002 (2002-03-07) the whole document	1,2
A	US 6 177 881 B1 (CASTANEDA JULIO C ET AL) 23 January 2001 (2001-01-23) abstract; figure 1	1-10
A	WO 00 56040 A (ERICSSON TELEFON AB L M) 21 September 2000 (2000-09-21) abstract; figure 1	1-10
A	WO 01 05521 A (KOBAYASHI TSUKASA ;NOTO MAKOTO (JP); SEI JUNICHIRO (JP); MATSUSHITA) 25 January 2001 (2001-01-25) abstract; figures 1,2	1-10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

30 September 2003

Date of mailing of the international search report

09/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Ramos, H

INTERNATIONAL SEARCH REPORT

International Application No.

EP 03/05069

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 2002027009	A1	07-03-2002	CN	1378419 A	06-11-2002
			CN	1177904 A ,B	01-04-1998
			EP	0833466 A2	01-04-1998
			JP	3292453 B2	17-06-2002
			JP	10154895 A	09-06-1998
			JP	2002324996 A	08-11-2002
			US	6333459 B1	25-12-2001
<hr/>					
US 6177881	B1	23-01-2001	NONE		
<hr/>					
WO 0056040	A	21-09-2000	SE	515918 C2	29-10-2001
			AU	3849300 A	04-10-2000
			CN	1343416 T	03-04-2002
			DE	10084324 T0	25-04-2002
			JP	2002539720 T	19-11-2002
			WO	0056040 A1	21-09-2000
			SE	9900963 A	16-09-2000
<hr/>					
WO 0105521	A	25-01-2001	JP	2001029887 A	06-02-2001
			CN	1317998 T	17-10-2001
			GB	2356914 A ,B	06-06-2001
			WO	0105521 A1	25-01-2001
			US	6542381 B1	01-04-2003